

LMA TIMBER HARDWOOD INTERIOR CLADDING

PURPOSE

LMA Timber Hardwood Interior Cladding is sustainably sourced or reclaimed hardwood interior suitable for residential and commercial applications.

It can be used for decorative and general purposes, such as wall or ceiling linings, wall paneling, sarking and flooring.


EXPLANATION

LMA Timber's Hardwood Interior Cladding is milled from Australian, Indonesian and reclaimed hardwood species.

Timbers include blackbutt, spotted gum and Tasmanian eucalyptus species (*Eucalyptus regnans*, *Eucalyptus obliqua* and *Eucalyptus nitens*, collectively known as Tasmanian oak), and Indonesian teak.

Available profiles:

- Haradeco wall panels – 18 cm x 49.5 cm; 0.891 m2 per box.
- tongue-and-groove boards: rustic – 80 mm x 10 mm, dressed, sawn or saw tooth – 130 mm x 12 mm, plantation oak – 140 mm x 19 mm, in assorted lengths.
- deeply weathered reclaimed planks - 190 mm x 30 mm in assorted lengths.
- plantation oak battens – 60 mm x 25 mm
- solid and engineered flooring: solid – 130 mm or 180 mm x 19 mm, engineered – 134 mm or 186 mm x 14 mm.

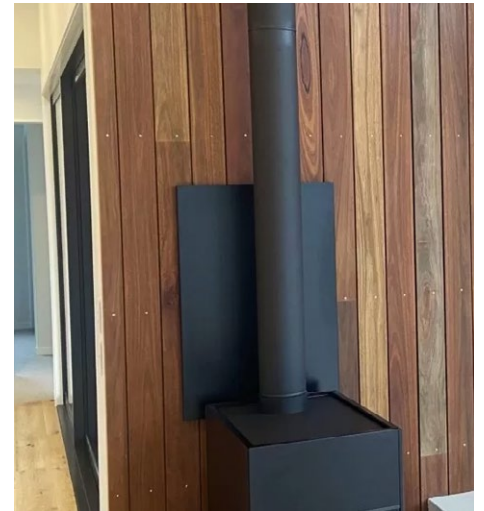

For further assistance, please contact:

- ☎ 027 255 4345
- ✉ info@lmatimber.co.nz
- 🌐 lmatimber.co.nz

SCOPE AND LIMITATIONS OF USE

Scope	Limitations
Building Where the balance of the primary structure complies with the relevant provisions of the NZ Building Code, or in the case of an existing building, where the designer has established it is suitable for the intended building work. In conjunction with a wall substrate of plasterboard, plywood, concrete, brick, or blockwork or a floor substrate of concrete grade-on-slab or suspended concrete, structural timber (plywood, particle board, OSB) or timber strip flooring that complies with the NZ Building Code or where the designer and/or installer have established that the existing framing is suitable for the intended building work.	<ul style="list-style-type: none"> ➤ Installation in wet areas or areas subject to high moisture content or frequent water exposure (e.g., water splash) is not recommended. Contact LMA Timber for advice. ➤ LMA Timber Hardwood Interior Cladding must not be used where C3.4 (a) applies. ➤ It is not suitable for use as a structural element, although the panelling is designed to be self-supporting. ➤ The internal lining, ceiling lining, panelling or sarking must be fixed with appropriate fixings for the application.
As an internal flooring.	<ul style="list-style-type: none"> ➤ Installation in wet areas or areas subject to high moisture content or water splash is not recommended. Contact LMA Timber for advice. ➤ Concrete subfloors must be cured for 60 days prior to installation. The surface level variation must be no greater than 2 mm or over 2 m in length. ➤ LMA Timber Hardwood Interior Cladding must not be installed over an electrical radiant heating system. ➤ For hydronic underfloor heating, the subfloor surface temperature must not exceed 27 °C. ➤ LMA Timber Hardwood Interior Cladding must not be used where C3.4 (b) applies. ➤ The internal flooring must be fixed with appropriate fixings for the application.

USEFUL INFORMATION

For design, installation and maintenance information, refer to lmatimber.co.nz.

PERFORMANCE CLAIMS

If designed, installed, and maintained in accordance with all LMA Timber requirements, LMA Timber Hardwood Interior Cladding will comply with or contribute to compliance with the following performance claims:


NZ Building Code clauses	BASIS OF COMPLIANCE	
	Compliance statement	Demonstrated by
B1 STRUCTURE B1.3.1, B1.3.2, B1.3.3 (a,j,q), B1.3.4	ALTERNATIVE SOLUTION	➤ Physical characteristics of hardness, toughness, shrinkage and tangential movement [Timber Queensland, 03/2014].
B2 DURABILITY B2.3.1(c)	ALTERNATIVE SOLUTION	➤ Class 1, 2 and 3 durability to AS 5604-2005 [Timber Queensland, 03/2014].
F2 HAZARDOUS BUILDING MATERIALS F2.3.1	ALTERNATIVE SOLUTION	➤ Use in accordance with the supplier's instructions.

SOURCES OF INFORMATION

➤ Timber Queensland. [03/2014] *Technical Data Sheet*.

SCAN OR CLICK THIS QR CODE TO ACCESS OR REQUEST THE RELEVANT SUPPORTING DOCUMENTATION FOR THIS PASS™.

lmatimber.co.nz

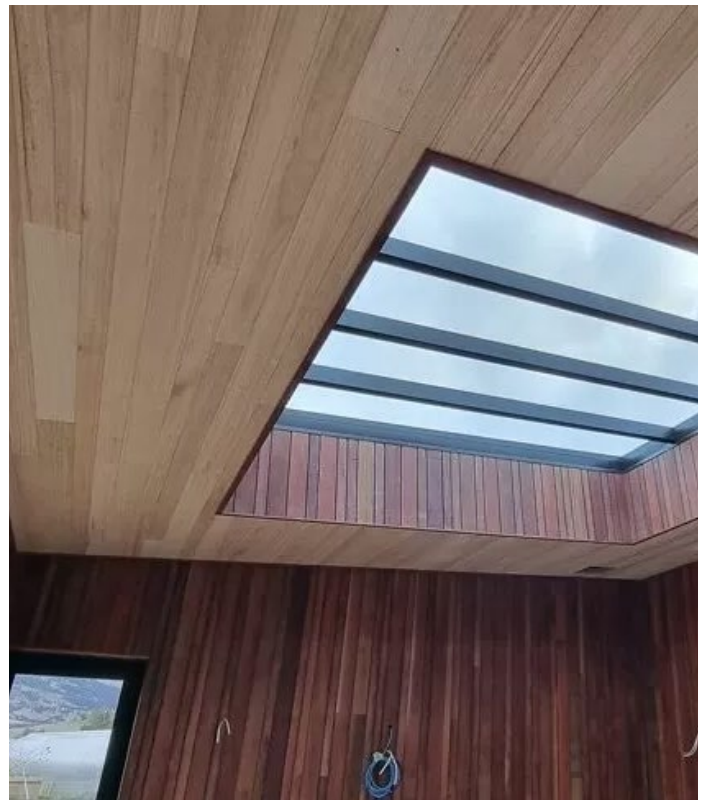

1. Where a standard is referenced it is to be read as amended by the acceptable solution or verification method as applicable. 2. Sources of information also include the Building Act 2004 and its regulations, including the Building Code (Schedule 1 of the Building Regulations 1992), Acceptable Solutions and Verification Methods, and relevant cited standards. 3. The product is not subject to a warning or ban under section 26 of the Building Act. 4. For overseas manufacturer details, where applicable, refer to the company that is the holder of this pass™. 5. The quality and assurance that the supplied products meet the performance claims stated in this pass™ are the responsibility of the company that is the holder of this pass™. 6. The availability of the information about the supplied products required to be disclosed under s14G(3) is the responsibility of the company that is the holder of this pass™.

LMA Timber Ltd confirms that if LMA Timber Hardwood Interior Cladding is used in accordance the requirements of this pass™ the product will comply with the NZ Building Code and other performance claims set out in this pass™ and the company has met all of its obligations under s14G(2) of the Building Act.

Date of first issue: 18/11/2024

Date of current issue: 18/11/2024

NZBN: 9429046749680

Kevin Brunton

Kevin Brunton, Technical Director, TBB confirms that the process used to prepare this pass™ on behalf of LMA Timber Ltd has been undertaken in accordance with MBIE PTS guidelines and in accordance with the TBB pass™ process which is within the scope of TBB's ISO 9001 certification.

90566D6A68E04C0DCA258AB4001045C0

66 Wickham Street, Bromley, Christchurch 8062 ➤ info@lmatimber.co.nz ➤ 027 255 4345 ➤ lmatimber.co.nz

Copyright © 2017, The Building Business Limited (TBB). All rights reserved.

VERSION: 1.0

Uncontrolled in printed format